



**ON Semiconductor®**

## **White Paper**

**A Halogen Desk Lamp Conversion to LEDs that  
meets the ENERGY STAR® SSL Power Factor  
Requirement for Residential Luminaires**

**Jim Young/Bernie Weir**  
**29 May 2009**

It is estimated by the International Energy Agency that more than 19% of electrical energy demand globally is used for lighting. As a result, there has been significant effort around the globe in replacing in-efficient incandescent light sources with higher efficiency solutions. Much of the focus in curbing this demand at the consumer level has been in programs to drive adoption of compact fluorescent lamps (CFL). The choice of using CFLs is not without consequence; each bulb contains mercury which, when not disposed of properly, ends up in landfills. Moreover, the form factor is not ideal for all lighting applications. An alternative which has been gaining significant attention is phosphor converted “white” LEDs. LED lumen output and efficacy – the measure of lumen output versus input power - continues to make significant progress year over year while, at the same time, the cost in terms of lumen/\$ is falling. Beyond energy savings, High brightness LEDs can have lifetimes of greater than 50,000 hours when properly designed and operated which eliminates the cost of replacing bulbs.

An off-the-shelf halogen desk lamp was used as the basis for a demonstration of the real world performance of today’s latest production LED light sources. A Cree XLAMP® MC-E LED was used as the light source. This product incorporates 4 LEDs in a single compact package which is ideal for directed light applications such as MR-16 and Portable Task Lamps. The original lamp was characterized before and after modification to highlight the real world performance differences.

The DoE ENERGY STAR Standard for Solid State Lighting Luminaires (Version 1.1 - 12/19/08) includes requirements for a minimum power factor (PF) of 0.7 for portable residential desk lamps. Typical LED drivers at this power level normally have a PF of 0.5-0.6 which falls below the requirements. The solution presented here has been specifically designed to exceed the residential ENERGY STAR® PF requirements without the addition of extra circuitry.



Figure 1: Off-the-shelf 50W halogen portable desk lamp



Figure 2: 50W Bulb in lamp housing with protective glass cover and handle

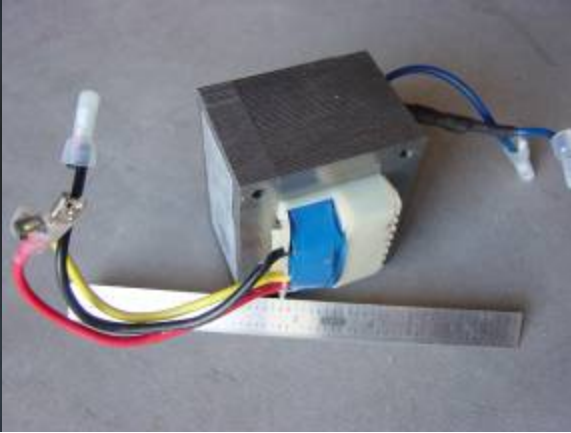


Figure 3: 60 Hz iron-core transformer, 2.4 pounds

Halogen incandescent bulbs typically operate at temperatures in excess of 250-350 °C and consequently luminaires must provide safeguards for users. In this case, a glass cover plate restricts access to the bulb to protect the user and a plastic shell provides a thermal shield above the bulb. Even with these safeguards, this halogen luminaire includes a handle on the end of a rod allowing the user to safely aim the light. The glass is special as it incorporates a filter to reduce unwanted UV light generated by the halogen bulb. A typical 12 V halogen bulb used in these desk lamps can have efficacies ranging from 14 to 18 lm/W. Note this is only the rated efficacy of the bulb and does not include fixture losses or the losses from the transformer, as illustrated in Figure 3, which is located in the base of the lamp.

High brightness LEDs display significantly higher light conversion efficiency and therefore produce less waste heat for a given light output. Less waste heat means the lamp assembly operates much cooler and does not expose the user to dangerous high temperatures. The bulb assembly was redesigned with a heat sink (Figure 4) which fits within the existing plastic housing of the bulb fixture. The cast aluminum insert shown below was installed in the lamp shell. A neutral white Cree MCE (code - 000-KE5 – 4000K) was mounted on a metal core PCB sub-mount to aid in assembly. LED performance was evaluated with and without secondary optics. This LED was selected to meet the ENERGY STAR correlated color temperature (CCT) requirement and had ample flux to far exceed the minimum requirement of 200 lumens out of the luminaire for the SSL Residential Desk Lamp requirement. The LED is rated for 370 to 430 lumens at a test current of 350 mA and at 25 °C. Taking into account the actual drive current (630 mA) and the steady state operating temperature, the estimated lumen output from the LED is in the range of 450 to 600 lumens which is dependent on the heat sink design. The secondary optic is an off-the-shelf 32 degree reflector (FRC-M1-MCE-0R) from FRAEN which is specifically designed for the MC-E.



Figure 4: Custom heatsink for lamp shell



Figure 5: Cree MC-E mounted on sub-mount and connected to heatsink



Figure 5a: Cree MC-E including reflector optic

The LED assembly is powered with an ON Semiconductor NCP1014LEDGTGEVB LED Driver evaluation board. This high efficiency driver provides the required galvanic isolation and regulated drive current to power the LED array. It features a universal input power range from 90 to 265 Vac which allows one design to be used in multiple regions with only a cabling change for the wall plug. This is not the case with the existing halogen iron-core transformer as it is designed specifically for one range of line voltage. The evaluation board supports the use of a potentiometer for variable dimming with a current adjustment range of 100-630 mA. The 630 mA maximum current was set to stay safely below the 700 mA maximum operating current of the Cree MC-E. Figure 6 below is a typical curve of the NCP1014LEDGTGEVB LED driver power factor correction performance as a function in input line voltage. As illustrated, for the US line voltage range the power factor is well above 0.8 which far exceeds the ENERGY STAR residential SSL Luminaire requirement of 0.7. The driver also meets the harmonic content requirements of IEC61000-3-2 Class C.

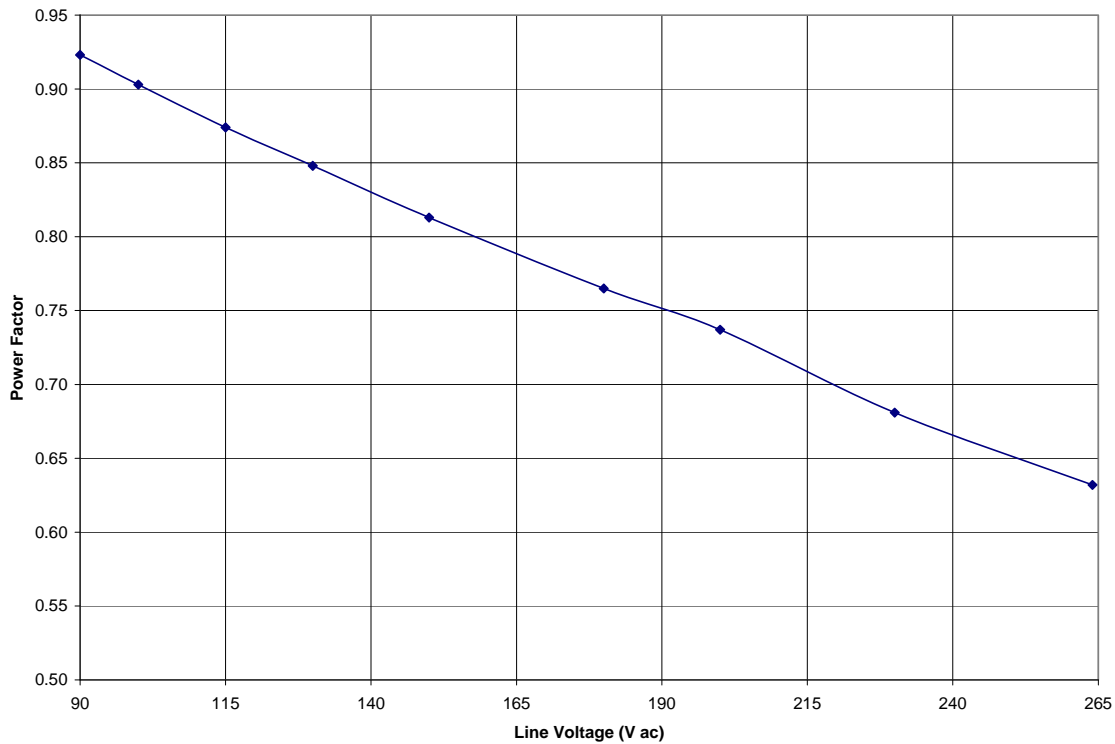


Figure 6: NCP1014LEDGTGEVB power factor performance at normal load

Shown in Figure 7 is the LED driver board mounted in the base of the desk lamp. Note that a ballast weight was required to stabilize the lamp since the original transformer, which provided a counterbalance, was removed from the base. In a portable desk lamp design optimized specifically for LEDs the base would be wider and flatter to stabilize the lamp assembly without the need for added weight. Figure 8 illustrates the LED driver demo board mounted in a display case with no counterweight needed to support the head.



Figure 7: NCP1014LEDGTGEVB constant current driver board mounted in base of desk lamp



Figure 8: Demo lamp with alternate base

Data shown below in Table 1 was collected on the desk lamp with the original 50 Watt halogen bulb and a replacement 35 Watt halogen bulb. Additional measurements made after conversion to the LED source are shown with and without an additional optical reflector which redirects stray light to a more central location. Illuminance expressed in lux is the measurement of luminous intensity on a surface at a distance of 0.5 meters from the light source.

Table 1: Before and After Comparison

Configuration	Setting	Source	Illuminance (lux)	Pin (W)
50 W Halogen compared to Cree MC-E with FRAEN Reflector Optics	High	Halogen	1462	56.6
		LED (IDrive = 630 mA)	2596	10.9
	Low	Halogen	744	40.9
		LED (IDrive = 100 mA)	646	1.67
35 W Halogen compared to Cree MC-E without secondary optics	High	Halogen	847	40.4
		LED (IDrive = 630 mA)	962	10.9
	Low	Halogen	435	29.4
		LED (IDrive = 100 mA)	236	1.67

While a comparison of the illuminance directly below the light source is important, even distribution of light on the surface is also significant so other test points were selected at a 0.25m offset from the center to characterize the distribution of the light under normal operation conditions. A summary is shown in Table 2.

Table 2: Light Distribution Pattern

Lamp	Illuminance @ 0.25m Offset (lux)			Analysis	
	Left	Right	Front	Mean	Sigma
50 W Halogen	853	800	727	793	51.6
LED w/optic	580	577	529	562	23.4
35 W Halogen	496	485	443	475	22.8
LED	518	527	490	512	15.7

In this example, the converted LED desk lamp produced 13% greater illuminance than the 35 W halogen bulb yet consumed 73% less electricity. Interestingly, after reviewing the performance of the magnetic transformer alone in the original 50 W desk lamp, it had approximately 8.3 W of loss which is more than the 8.0W used by the LEDs in the converted desk lamp. In other words, the transformer in the base of the original halogen lamp consumed more power than the LEDs in the converted desk lamp.

Figure 9 below displays a comparison of light patterns between the halogen lamp on the left and the converted LED lamp on the right. The comparison is between a 35W halogen bulb and the LED without any secondary optics. Note the non-uniform pattern created by the tubular shape of the GY6.35 halogen bulb. Conversely, the LED assembly is mounted in a circular recessed area of the heat sink as shown in Figure 5 above. This provides a more circular light pattern with uniform illumination in all directions. High brightness LEDs excel at providing uniform directional light distribution due to their lambertian light structure.



Figure 9: Light pattern of 35W Halogen and LED lamps

Recessing the LED inside the heat sink facilitates the possibility of using secondary optics and avoids possible glare if the lamp were at eye level. As seen in table 1, center illuminance increased by 170% by incorporating additional reflector optics. Combining LED performance with a high efficiency driver and an off-the-shelf optic provides a lighting solution far superior to a halogen luminaire.

The surface of the exposed glass plate covering the halogen bulb measured over 250 °C. By comparison, the maximum temperature of the LED mounting substrate was only 77 °C. Since this was a retrofit, the existing plastic housing for the halogen bulb was re-used, which had no venting. With the plastic cover removed, the LED mount temperature dropped to less than 63 °C; if the product was optimized for LED operation, the thermal environment would improve further as the non-vented cover could be redesigned or removed depending on the end product design considerations. Note as well, under normal drive conditions (350 mA), the LED mount temperature with the cover on was 49 °C.

The benefits in energy consumption are clear. The higher efficiency, smaller size and weight, and lower LED power dissipation opens the door for innovative luminaire designs which have historically been constrained by the limitations of halogen bulbs. Effective solutions are possible when coupled with an appropriate LED driver circuit to simplify the product design so that, with only minor changes,




the same product could be sold in all regions of the world. Moreover, the adjustable control allows the user to further optimize the light output for their specific environmental needs instead of the one or two light levels of a traditional halogen based desk lamp. Energy savings increase substantially at lower brightness settings.

A driver optimized for universal AC input of 90-265 Vac allows a manufacturer to utilize one basic luminaire design for all markets and only the power cable would need to be changed by region. Luminaires based around state-of-the-art LEDs such as the Cree XLAMP MC-E and driven by high efficiency constant current source drivers will allow the introduction of new long lasting, energy saving general lighting products. While this example shows the performance of a retrofit application, further optimization can be achieved if the luminaire was designed specifically with LEDs from the start.

#### Reference Material

- 1) ENERGY STAR® SSL Luminaire Specification, Version 1.1  
[http://www.ENERGY STAR .gov/index.cfm?c=new\\_specs.ssl\\_luminaires](http://www.ENERGY STAR .gov/index.cfm?c=new_specs.ssl_luminaires)
- 2) Cree XLAMP MC-E Specification  
[http://www.cree.com/products/xlamp\\_mce.asp](http://www.cree.com/products/xlamp_mce.asp)
- 3) Fraen Reflector Optics for Cree MC-E  
<http://www.fraensrl.com/prodinfo.html>
- 4) ON Semiconductor Design Note DN06051 Improving the Power Factor of Isolated Flyback Converters for Residential ENERGY STAR® LED Luminaire Power Supplies  
[http://www.onsemi.com/pub\\_link/Collateral/DN06051-D.PDF](http://www.onsemi.com/pub_link/Collateral/DN06051-D.PDF)

*ON Semiconductor and the ON Semiconductor logo are registered trademarks of Semiconductor Components Industries, LLC. All other brand and product names appearing in this document are registered trademarks or trademarks of their respective holders.*

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### **PUBLICATION ORDERING INFORMATION**

##### **LITERATURE FULFILLMENT:**

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

**TND358/D**